



3-in-1 Dimmable
LED Natural Sunlight
GL-AR111-V2ADA-12-NL

Features



- High CRI is 97.
- High CQS is 98.
- TM-30-15 Rf is up to 97.
- TM-30-15 Rg is up to 102.
- 3-in-1 dimming functions optional.
- Optional square gimbals housing kit and round single housing accessories available.




Specifications

| Model No. | GL- AR111-V2ADA-12-NL -WW |
|-----------------------|---|
| Energy Used | 11.1W |
| Rated Life | 30,000 Hours |
| Input Voltage | 100-240V AC |
| Power Factor (PF) | 0.86 at 120V AC, 0.8 at 240V AC (without dimmer) |
| CCT (color) | 2700K |
| Luminous Flux | 800 lm |
| System Efficacy | 72 lm/W |
| CRI (Typ.) | 97 |
| CQS (Typ.) | 98 |
| TM-30-15 Rf (Typ.) | 97 |
| TM-30-15 Rg (Typ.) | 102 |
| Beam Angle | 26° |
| Base | G53 |
| Dimension | Ø 111 x 52.7mm |
| IP Rating | IP20 |
| Operation Temperature | -20°C ~ +40°C |
| Bundled Driver | GP-HS10P-48CA (Driver Output : Constant Current 250mA, 26-48Vdc) |
| Net Weight | 200g (with driver) |
| Package | 36 Boxes / Carton |

Spectrum

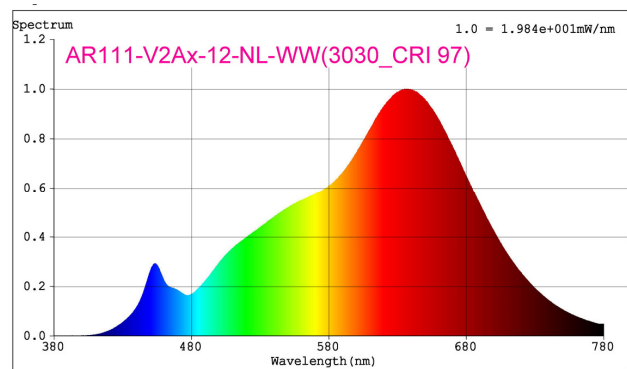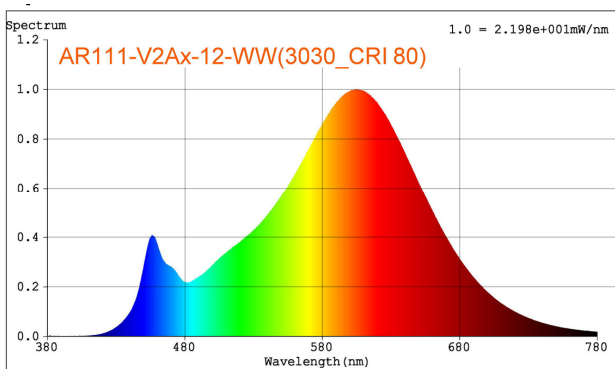


Outline / Dimension


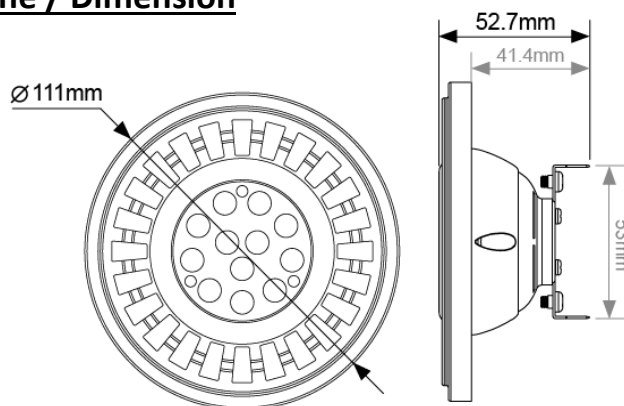


Luminous Intensity Distribution Diagram


GL-AR111-V2ADA-12-NL-WW-26D / CCT : 2700K

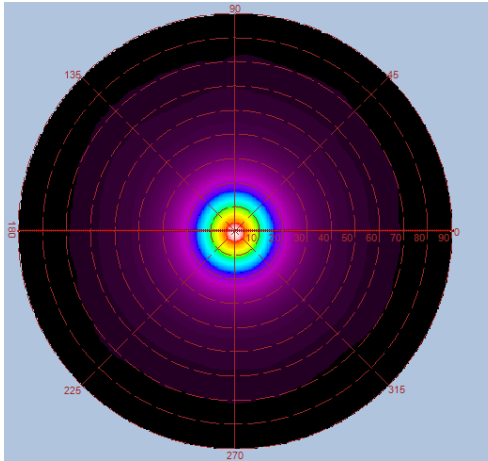


光强度(Candela)

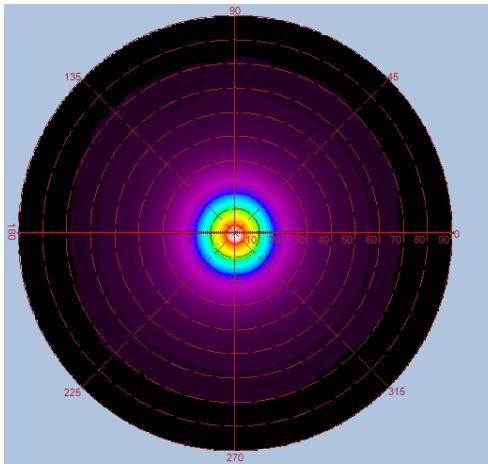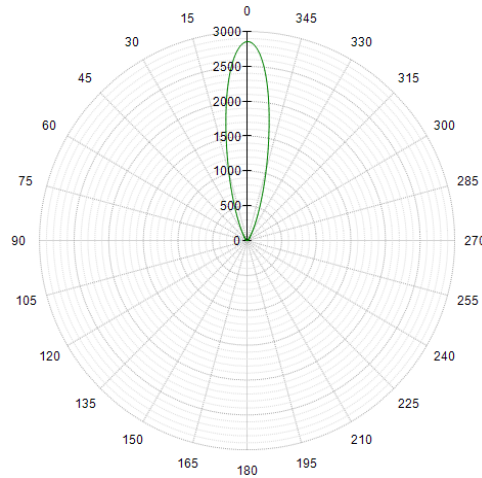

光强度(Candela)

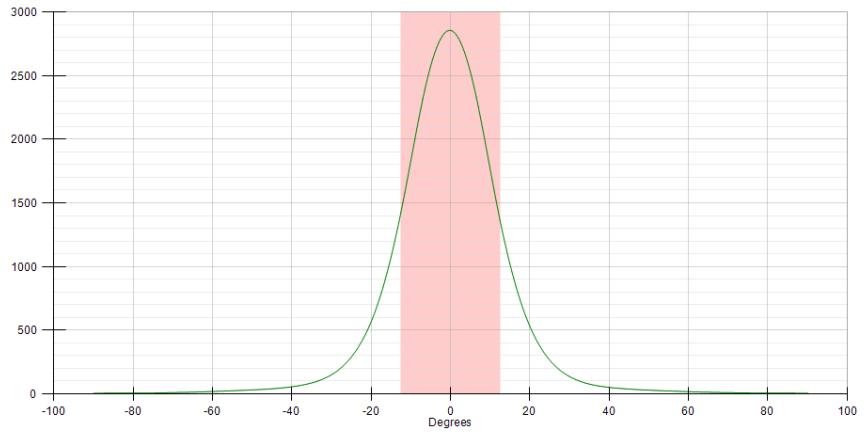

| Height | E Avg. | E Max. | Diameter |
|--------|---------|---------|----------|
| 1.0M | 2677 Lx | 3591 Lx | 46 cm |
| 2.0M | 640 Lx | 841 Lx | 92 cm |
| 3.0M | 280 Lx | 369 Lx | 139 cm |
| 4.0M | 157 Lx | 204 Lx | 185 cm |
| 5.0M | 100 Lx | 130 Lx | 231 cm |

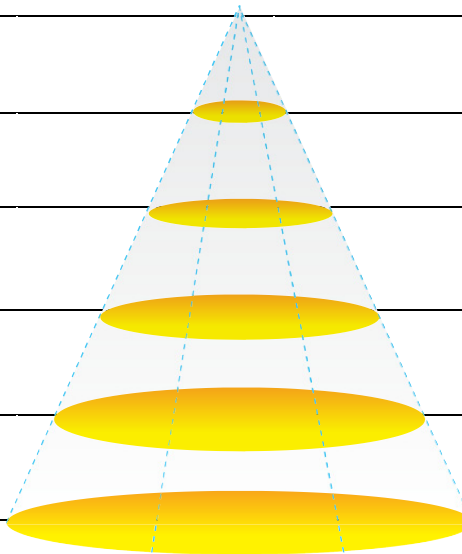

Application



Bundled Driver :  GlacialPower® GlacialPower LED Driver



3-in-1 Dimmable : GP-HS10P-48CA